


FIG-1:DC OUTPUT CONNECTOR

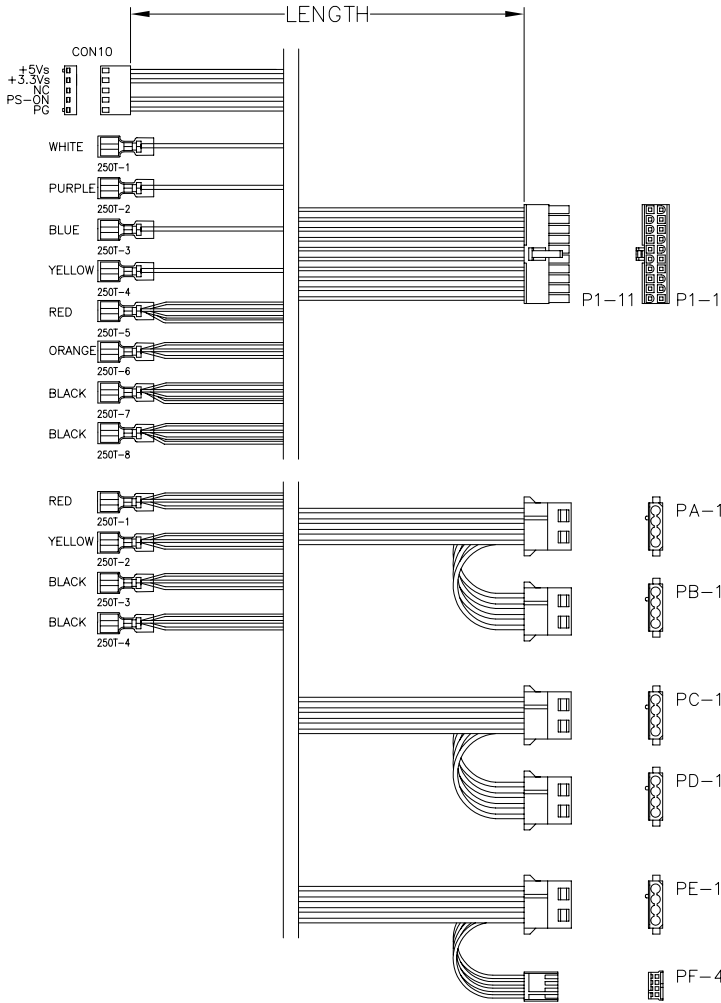

CONN	PIN	WIRE COLOR	OUTPUT	LENGTH
P1	1	ORANGE	+3.3V, S+	20.0±1.0 (510±25)
		ORANGE	+3.3V	
	2	ORANGE	+3.3V	
	3	BLACK	GND	
	4	RED	+5V	
	5	BLACK	GND	
	6	RED	+5V	
	7	BLACK	GND	
	8	GRAY	PG	
	9	PURPLE	+5Vsb	
	10	YELLOW	+12V	
	11	ORANGE	+3.3V	
	12	BLUE	-12V	
	13	BLACK	GND	
	14	GREEN	PS-ON	
	15	BLACK	GND	
	16	BLACK	GND	
	17	BLACK	GND	
	18	WHITE	-5V	
	PA,PC PE	1	RED	
RED			+5Vs	
2		YELLOW	+12V	
3		BLACK	GND	
PB,PD	1	BLACK	GND	
		BLACK	GND	
		RED	+5V	
PF	1	RED	+5V	
		BLACK	GND	
		BLACK	GND	
		YELLOW	+12V	

NOTE:

P1:

HOUSING: MOLEX 39-01-2200 OR EQU
 TERMINAL: MOLEX 39-00-0060

PA,PB,PC,PD,PE:


HOUSING: AMP 1-480424-0 OR EQU
 TERMINAL: AMP 60619-4

PF:

HOUSING: AMP 171822-4 OR EQU
 TERMINAL: AMP 170262-2

CON10: WST P5-125004 OR EQU

ALL TERMINALS ARE PHOS. BRONZE, PRE-TIN

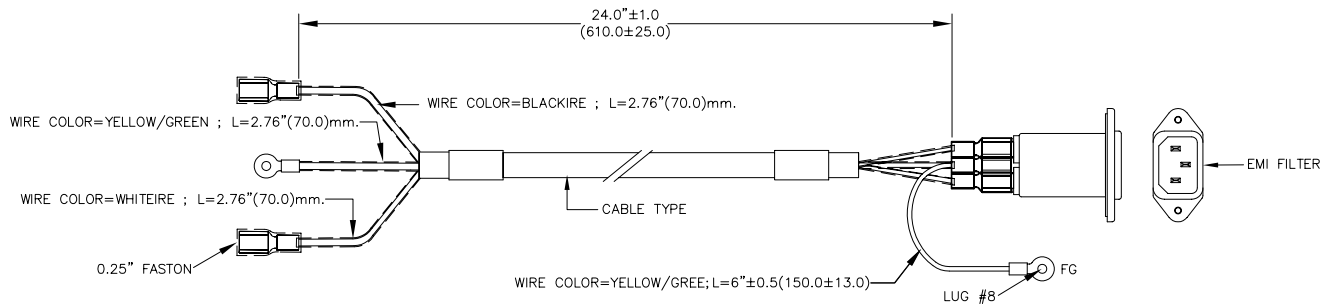

NOTE:

1. EMI FILTER SPEC.:10GEEG3E(SE) (Delta).
2. 0.25" FASTON:STO-61T-250N(JST).
3. CABLE TYPE:UL 2464 18AWG 80°C 300V
4. GND LUG:B40403BS-2(WST) OR EQU.

	APPROVED	CHECKED	DRAWING NO.	UNIT	REV.
	TUNGPO	JASPER	C-02	INCHES(MM)	
TITLE	DESIGNED	DRAWING	MODEL NO.	TOLERANCES:	SHEET
PRB SERIES - AC I/P CABLE (REMOVABLE)	CHEFON	JOLN	PRB250Q-J3	.X = ± 0.2 .XX = ±0.15	1/1