


FIG-1: DC OUTPUT CONNECTOR

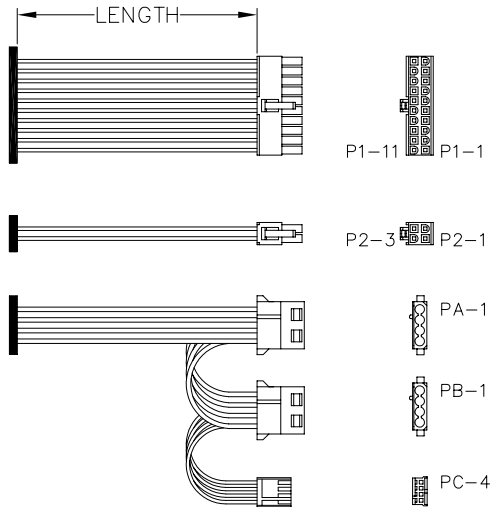

CONN	PIN	WIRE COLOR	OUTPUT	LENGTH	
P1	1	ORANGE	+3.3V, S+	20.0±1.0 (508±25)	
	2	ORANGE	+3.3V		
	3	BLACK	GND		
	4	RED	+5V		
	5	BLACK	GND		
	6	RED	+5V		
	7	BLACK	GND		
	8	GRAY	PG		
	9	PURPLE	+5Vsb		
	10	YELLOW	+12V		
	11	ORANGE	+3.3V		
	12	BLUE	-12V		
	13	BLACK	GND		
	14	GREEN	PS-ON		
	15	BLACK	GND		
	16	BLACK	GND		
	17	BLACK	GND		
	18				
	19	RED	+5V		
	20	RED	+5V		
P2	1	BLACK	GND		
	2	BLACK	GND		
	3	YELLOW	+12V		
	4	YELLOW	+12V		
PA	1	YELLOW	+12V		
	2	BLACK	GND		
	3	BLACK	GND		
	4	RED	+5V		
PB	1	YELLOW	+12V	6.0±0.5 (150±12)	
	2	BLACK	GND		
	3	BLACK	GND		
	4	RED	+5V		
PC	1	RED	+5V		
	2	BLACK	GND		
	3	BLACK	GND		
	4	YELLOW	+12V		

NOTE:

P1:

HOUSING: MOLEX 39-01-2200 OR EQU
 TERMINAL: MOLEX 39-00-0060

P2:

HOUSING: MOLEX 39-01-3042 OR EQU
 TERMINAL: MOLEX 39-00-0060

PA,PB:

HOUSING: AMP 1-480424-0 OR EQU
 TERMINAL: AMP 60619-4

PC:

HOUSING: AMP 171822-4 OR EQU
 TERMINAL: AMP 170262-2

ALL TERMINALS ARE PHOS. BRONZE, PRE-TIN

	APPROVED	CHECKED	DRAWING NO.	UNIT	REV.
	TUNGPO	JASPER	H-5-01	INCHES(MM)	
TITLE	DESIGNED	DRAWING	MODEL NO.	TOLERANCES:	SHEET
PSG SERIES - ATX 5 O/P CABLE	PAUL	JOLN	PSG SERIES	.XX = ± .10 .XXX = ± .010	1/1