


FIG-1: DC OUTPUT CONNECTOR

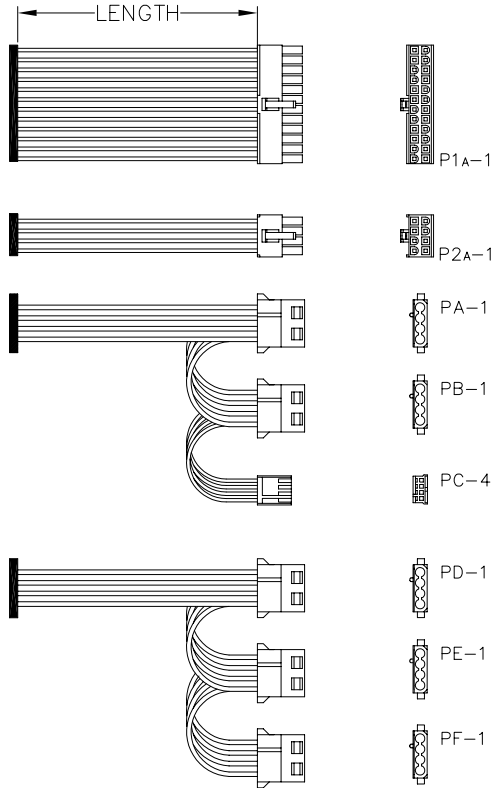

CONN	PIN	WIRE COLOR	OUTPUT	LENGTH
P1 <sub>A</sub>	1	ORANGE	+3.3V, S+	20.0±1.0 (508±25)
	2	ORANGE	+3.3V	
	3	BLACK	GND	
	4	RED	+5V	
	5	BLACK	GND	
	6	RED	+5V	
	7	BLACK	GND	
	8	GRAY	PG	
	9	PURPLE	+5Vsb	
	10	YELLOW	+12V	
	11	YELLOW	+12V	
	12	ORANGE	+3.3V	
	13	ORANGE	+3.3V	
	14	BLUE	-12V	
	15	BLACK	GND	
	16	GREEN	PS-ON	
	17	BLACK	GND	
	18	BLACK	GND	
	19	BLACK	GND	
	20	WHITE	-5V	
	21	RED	+5V	
	22	RED	+5V	
	23	RED	+5V	
	24	BLACK	GND	
P2 <sub>A</sub>	1	BLACK	GND	6.0±0.5 (152±12)
	2	BLACK	GND	
	3	BLACK	GND	
	4	BLACK	GND	
	5	YELLOW	+12V	
	6	YELLOW	+12V	
	7	YELLOW	+12V	
	8	YELLOW	+12V	
PA,PD	1	YELLOW	+12V	6.0±0.5 (152±12)
	2	BLACK	GND	
	3	BLACK	GND	
	4	RED	+5V	
PB,PE,PF	1	YELLOW	+12V	6.0±0.5 (152±12)
	2	BLACK	GND	
	3	BLACK	GND	
	4	RED	+5V	
PC	1	RED	+5V	6.0±0.5 (152±12)
	2	BLACK	GND	
	3	BLACK	GND	
	4	YELLOW	+12V	

NOTE:

P1<sub>A</sub>:  
 HOUSING: MOLEX 39-01-2240 OR EQU  
 TERMINAL: MOLEX 39-00-0060

P2<sub>A</sub>:  
 HOUSING: MOLEX 39-01-2080 OR EQU  
 TERMINAL: MOLEX 39-00-0060

PA,PB,PD,PE,PF:  
 HOUSING: AMP 1-480424-0 OR EQU  
 TERMINAL: AMP 60619-4

PC:  
 HOUSING: AMP 171822-4 OR EQU  
 TERMINAL: AMP 170262-2

ALL TERMINALS ARE PHOS. BRONZE, PRE-TIN

	APPROVED	CHECKED	DRAWING NO.	UNIT	REV.
	TUNGPO	JASPER	F-6-01	INCHES(MM)	
TITLE	DESIGNED	DRAWING	MODEL NO.	TOLERANCES:	SHEET
PSG SERIES - ATX 6 O/P CABLE	PAUL	JOLN	PSG SERIES	.XX = ± .10 .XXX = ± .010	1/1